



GTS-10120

GTS-11122

GTS-11222

QPSK/COFDM transmodulators with CI

GTS-10120, GTS-11122 and GTS-11222 transmodulators allow redistributing HD/SD services coming from one or two satellite inputs over a multistandard RF output. Depending on the module, one or two CI can host CAM modules to decode pay-TV services.



GTS-10120

DVB-T or DVB-C output standard: selected by a software option.

Easy programming: GDS Configurator software connected to the USB port.

Remultiplexing: one output channel is available for the one input-model (GTS-10120); two frequency-adjacent output channels are associated to each input in the case of the two inputs-models (GTS-11x22), with the possibility to remultiplex both inputs over a single output channel (software option).

NIT/TSID rewriting: it is possible to use original NIT and TSID service values or to assign custom values; this option is useful to distribute services from the same input transponder over two different output channels.

Parental control: specific services can be password-protected for age-limited access.

Hotel mode: LCN, PID, TSID and NIT values in the output channel can be fixed independently from the selected input services or input channel; this allows changing the distributed services with no need to tune again all TVs connected to the CATV distribution system.

Password protection and settings export: system configuration can be exported for backup and to replicate configuration on several modules; configuration access can be protected by a password.

Remote access: monitoring, configuring and rebooting a GTS system can be accomplished through Internet network, using the special GTS-80000 device.

Performance: the GTS Series transmodulators boast 40+ dB MER.


Modular system: Thanks to DIN bar mounting, it is possible to combine different GTS modules to realize a fully custom CATV headend in an easy and cost-effective way.



GTS-11122



GTS-11222

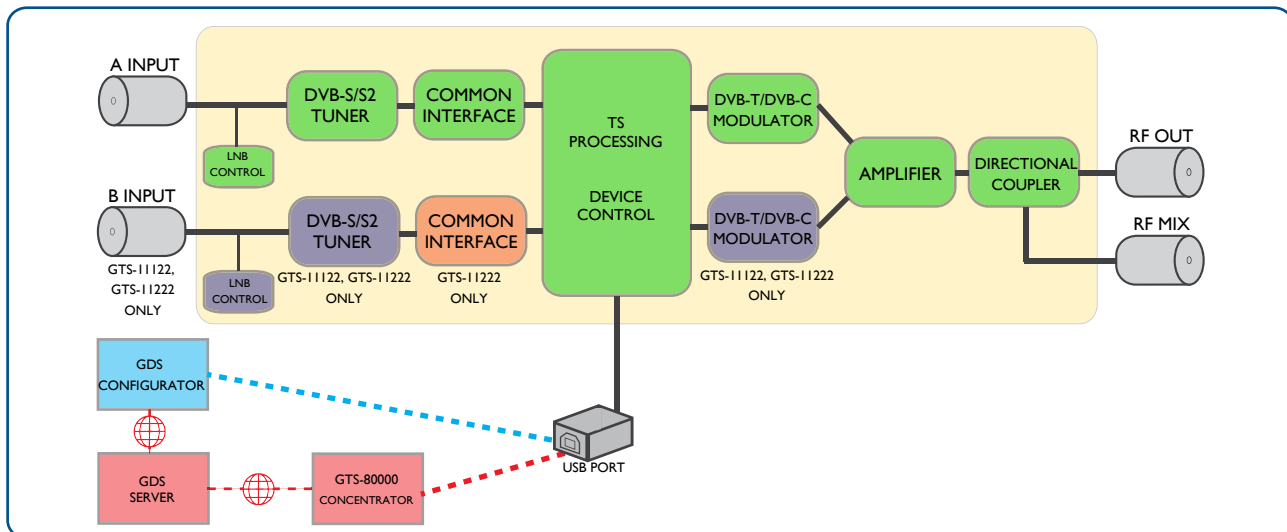

INPUTS		DVB-S/S2
Number of inputs	1 for GTS-10120 , 2 for GTS-11122 and GTS-11222	
Common Interface (CI)	1 for GTS-10120 and GTS-11122, 2 for GTS-11222	
Input frequency	950÷2150 MHz	
Input level	42÷82 dBuV	
Symbol rate	1÷45 Ms/s	
Modulation	QPSK / 8-PSK	
Telet powering	0/13V/18V - 350 mA (short-circuit protection, 0/22 kHz tone or Diseqc 1.0)	
MODULATOR SPECS		DVB-T
FFT	2k	
Constellation	QPSK / 16-QAM / 64-QAM	
FEC	1/2; 2/3; 3/4; 5/6; 7/8	
Guardia	1/4; 1/8; 1/16; 1/32	
MER	> 40 dB (typical: 42 dB)	
MODULATOR SPECS		DVB-C
Mapping	16-QAM / 32-QAM/64-QAM/128-QAM/256-QAM	
Roll-off	0.12 - 0.15 - 0.18	
Symbol rate	870÷7200 ksym/s	
OUTPUTS		DVB-T/DVB-C
Number of outputs	1 with loop-through (-1,5 dB loss)	
Frequency range	177.5÷858 MHz	
Number of channels	1 for GTS-10120 , 2 adjacent or 1 with remultiplexing for GTS-11122 and GTS-11222	
Channel bandwidth	7 MHz (VHF) / 8 MHz (UHF)	
Spectrum inversion	optional	
Output level	65÷85 dBuV	
OTHER SPECIFICATIONS		
Connections	RF I/O: female type-F; management: USB type-B	
Power	24 Vdc	
Power consumption	10 W + LNB for GTS-10120 , 12 W + LNB for GTS-11122 and GTS-11222	
Operative range	0÷40 °C	
Dimensions	53x226x155 mm	

Contact us

Want to know our products?

Want a quote and get our special offers?

Need help to create the solution that fits your ideal installation?

Visit our website:

www.gds-italy.com

Or send an e-mail:

info@gds-italy.com

Hope to hear from you soon!

GD Service srl
Registered office: Via Gretaglia snc - 55025 Ghivizzano (LU) - Italy

All contents, including text and images, cannot be copied, extracted or shared without explicit authorization of GD service srl.

All technical data declared may be subject to change without notice.

DVB is a registered trademark of the DVB Project.

