



GTS-20120

GTS-22222

QPSK/COFDM transmodulators with CI

GTS-20120 and GTS-22222 transmodulators allow redistributing HD/SD services coming from one or two DVB-T/T2 inputs over a multistandard RF output. For each input one CI can host a CAM module to decode pay-TV services.



GTS-20120

DVB-T or DVB-C output standard: selected by a software option.

Easy programming: GDS Configurator software connected to the USB port.

Remultiplexing: one output channel is available for the one input-model (GTS-20120); two frequency-adjacent output channels are associated to each input in the case of the two inputs-model (GTS-22222), with the possibility to remultiplex both inputs over a single output channel (software option).

NIT/TSID rewriting: it is possible to use original NIT and TSID service values or to assign custom values; this option is useful to distribute services from the same input transponder over two different output channels.

Parental control: specific services can be password-protected for age-limited access.

Hotel mode: LCN, PID, TSID and NIT values in the output channel can be fixed independently from the selected input services or input channel; this allows changing the distributed services with no need to tune again all TVs connected to the CATV distribution system.

Password protection and settings export: system configuration can be exported for backup and to replicate configuration on several modules; configuration access can be protected by a password.


Remote access: monitoring, configuring and rebooting a GTS system can be accomplished through Internet network, using the special GTS-80000 device.

Performance: the GTS Series transmodulators boast 40+ dB MER.

Modular system: Thanks to DIN bar mounting, it is possible to combine different GTS modules to realize a fully custom CATV headend in an easy and cost-effective way.



GTS-22222

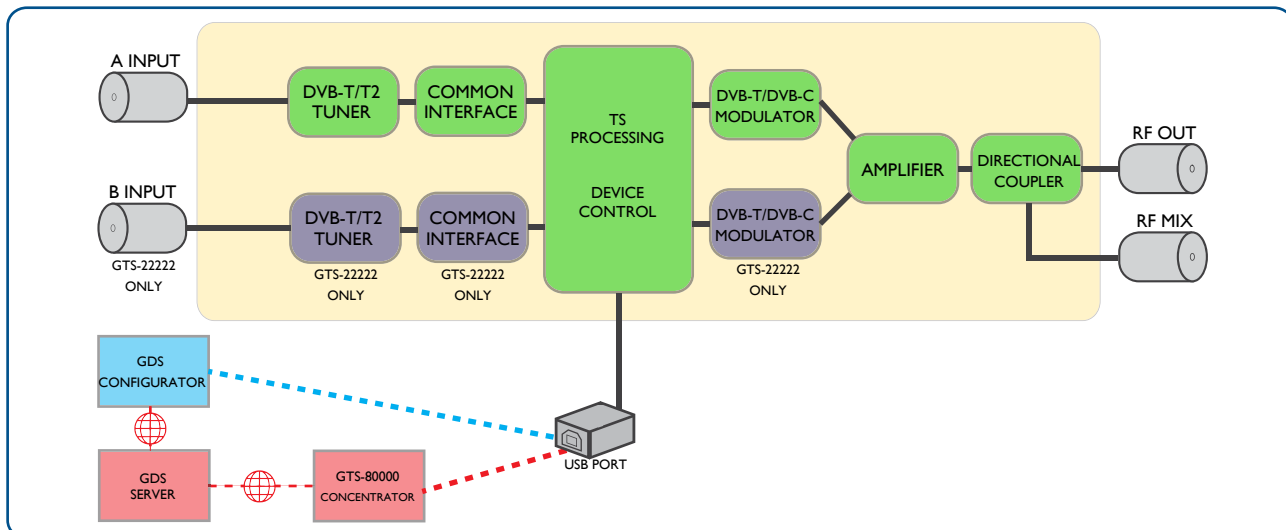

DVB-T2[®]
DVB-T[®]
DVB-C[®]

INPUTS	DVB-T/T2
Number of inputs	1 for GTS-20120 , 2 for GTS-22222 - with active loop-through (0 dB)
Common Interface (CI)	1 for GTS-20120 , 2 for GTS-22222
Input frequency	170÷230 MHz / 470÷862 MHz
Input level	42÷82 dBuV
Bandwidth	6÷8 MHz
Modulation	QPSK / 16-QAM / 64-QAM / 256-QAM
MODULATOR SPECS	DVB-T
FFT	2k
Constellation	QPSK / 16-QAM / 64-QAM
FEC	1/2; 2/3; 3/4; 5/6; 7/8
Guardia	1/4; 1/8; 1/16; 1/32
MER	> 40 dB (typical: 42 dB)
MODULATOR SPECS	DVB-C
Mapping	16-QAM / 32-QAM/64-QAM/128-QAM/256-QAM
Roll-off	0.12 - 0.15 - 0.18
Symbol rate	870÷7200 ksym/s
OUTPUTS	DVB-T/DVB-C
Number of outputs	1 with loop-through (-1,5 dB loss)
Frequency range	177.5÷858 MHz
Number of channels	1 for GTS-20120 , 2 adjacent or 1 with remultiplexing for GTS-22222
Channel bandwidth	7 MHz (VHF) / 8 MHz (UHF)
Spectrum inversion	optional
Output level	65÷85 dBuV
OTHER SPECIFICATIONS	
Connections	RF I/O: female type-F; management: USB type-B
Power	24 Vdc
Power consumption	10 W for GTS-20020 , 12 W for GTS-22022
Operative range	0÷40 °C
Dimensions	53x226x155 mm

Contact us

Want to know our products?

Want a quote and get our special offers?

Need help to create the solution that fits your ideal installation?

Visit our website:
www.gds-italy.com

Or send an e-mail:
info@gds-italy.com

Hope to hear from you soon!

GD Service srl
 Registered office: Via Gretaglia snc - 55025 Ghivizzano (LU) - Italy

All contents, including text and images, cannot be copied, extracted or shared without explicit authorization of GD service srl.

All technical data declared may be subject to change without notice.

DVB is a registered trademark of the DVB Project.

